

AB CLASS PREMIUM AMPLIFIER FPX 4.400 SQ


Mode 4/3/2 channels

Dedicated to sound quality



- AB Class 4/3/2 Channels amplifier - Dedicated to sound quality
- Stable under 2 Ohms
- Audiophile Sanken® Transistors
- High performance compact heat dissipation chassis
- High power and current dynamic reserve

MECHANICAL DRAWING

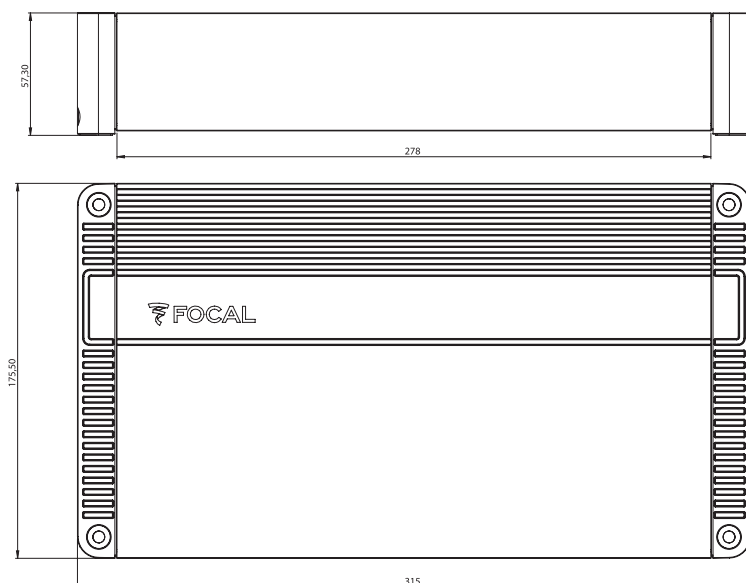

SPECIFICATIONS



AUDIO SPECIFICATIONS

CEA power (4 ohms)	4x70 Watts RMS
Max. power (2 ohms)	4x100 Watts RMS
Max. power (4 ohms bridged)	2x200 Watts RMS
Bandwidth (-3dB)	10Hz - 22KHz
THD	0.04%
Crosstalk (1 KHz)	> 54dB
SNR (1W/A)	> 77dBA

GENERAL FEATURES

Subsonic filter	-
High-pass/low-pass filter	Configurable High-pass/low-pass 40Hz-5000Hz
Full-range function	✓
Mirror mode	✓
Standby current (A)	0.6 A
Protections	Short circuit/low impedance/reverse polarity/DC/voltage drop/overheat protection
Dimensions (LxWxH)	12 ^{23/64} x 6 ^{57/64} x 2 ^{1/4} " [315x175x57mm]
Weight (kg)	8.16lbs [3.7kg]

