


D CLASS PREMIUM AMPLIFIER FPX 4.800

Mode 4/3/2 channels
Powerfull and compact



- D class 4/3/2 Channels amplifier
- Stable under 2 Ohms
- Audio Mos-Fets - Optimized efficiency
- High performance compact heat dissipation chassis
- High power and current dynamic reserve

MECHANICAL DRAWING

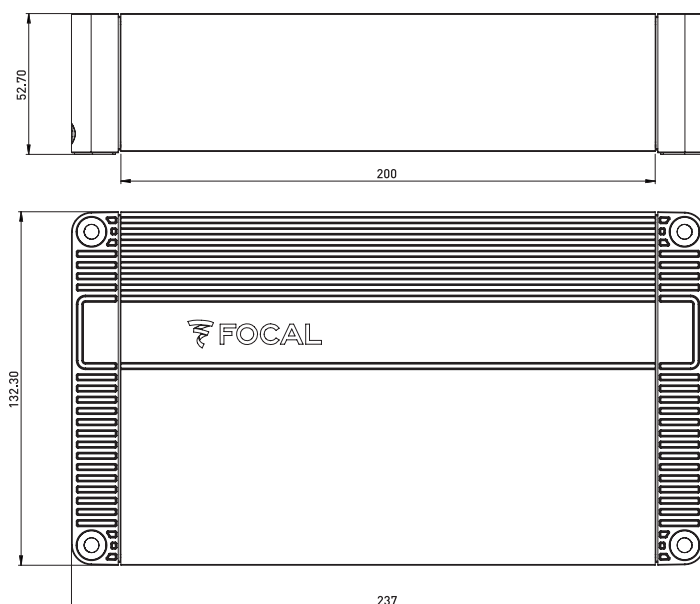

SPECIFICATIONS



AUDIO SPECIFICATIONS

CEA power (4 ohms)	4x120 Watts RMS
Max. power (2 ohms)	4x185 Watts RMS
Max. power (4 ohms bridged)	2x370 Watts RMS
Bandwidth (-3dB)	10Hz - 20KHz
THD	0.01 %
Crosstalk (1 KHz)	> 55dB
SNR (1W/A)	> 76dBA

GENERAL FEATURES

Subsonic filter	-
High-pass/low-pass filter	Configurable High-pass/low-pass 50Hz-500Hz
Bass boost	0 to 12 dB linear (¾)
Phase	-
Full-range function	✓
Mirror mode	✓
Standby current (A)	1.1 A
Protections	Short circuit/low impedance/reverse polarity/DC/voltage drop/overheat protection
Dimensions (LxWxH)	9 ^{21/64} x5 ^{13/64} x2 ^{33/32} " (237x132x53mm)
Weight (kg)	4.40lbs [2kg]

