


D CLASS PREMIUM AMPLIFIER FPX 5.1200

MODE 5/4/3 CHANNELS
Powerful and compact



- D Class amplifier - 5 output channels
- Copy mode: 6/4/2 inputs
- Stable under 2 ohms
- High power and current dynamic reserve (1 200W max.)
- Audio Mos-Fets - Optimized efficiency
- Subwoofer remote control supplied

MECHANICAL DRAWING

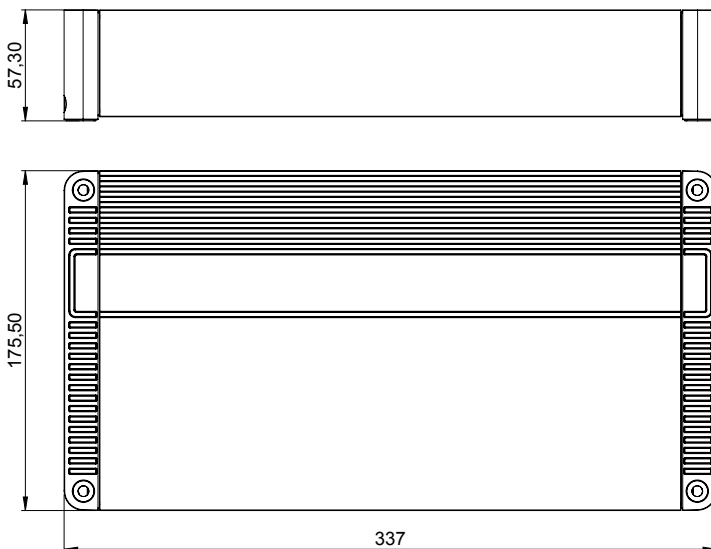

SPECIFICATIONS

AUDIO SPECIFICATIONS

CEA power (4 ohms)	4 x 75 Wrms + 1 x 420 Wrms
Max. power (2 ohms)	4 x 120 Wrms + 1 x 720 Wrms
Power max (channels 1 to 4 bridged at 4 ohms) + channel 5 at 2 ohms	2 x 240 Wrms + 1 x 720 Wrms
Bandwidth (-3dB)	10 Hz - 20 kHz
THD	0,03%
SNR (1W/A)	> 75 dB

GENERAL FEATURES

Subsonic filter	10Hz-50Hz (24dB/oct)
High-pass/low-pass filter	50 Hz - 500 Hz
Bass boost	0 to 12 dB linear
Phase	0 to 180° linear
Full-range function	✓
Mirror mode	✓
Standby current (A)	1,7
Protections	Short circuit/low impedance/reverse polarity/DC/voltage drop/overheat protection
Dimensions (LxWxH)	13 ^{17/64} " x 6 ^{57/64} " x 2 ^{1/4} " (337 x 175 x 57 mm)
Weight (kg)	9lbs (4.1kg)

